


# Technical data sheet

## Mounting lid 350 for Telitank

Item number: 7400431

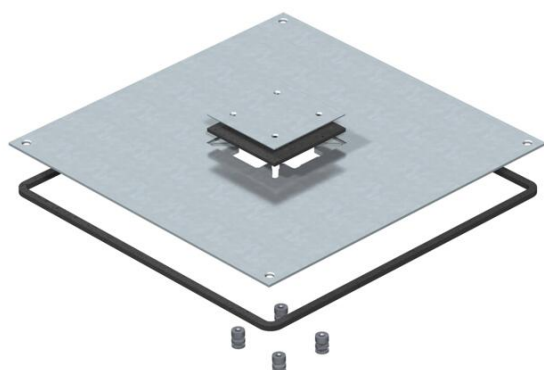

Mounting lid for underfloor junction and branch box of type UZD350-3/4 to install a Telitank. Installation opening 3 mm recessed as a later blanking lock with lid blanking plate.



**St** Steel

**FS** Strip galvanised

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7400431                   |
| Type                               | DUF 350-3 DAT             |
| Description 1                      | Mounting lid              |
| Description 2                      | 350-3 for Telitank        |
| Manufacturer                       | OBO                       |
| Dimension                          | 383x383x4                 |
| Material                           | Steel                     |
| Surface                            | Strip galvanised          |
| Surface standard                   | DIN EN 10346              |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 455 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 12,7396 kg CO2e / 1 Piece |


# Technical data sheet

## Mounting lid 350 for Telitank

Item number: 7400431



### Dimensions

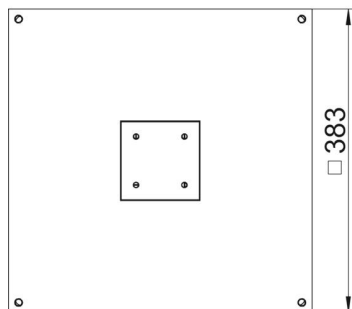

|             |        |
|-------------|--------|
| Length      | 383 mm |
| Width       | 383 mm |
| Dimension a | 100 mm |
| Dimension A | 383 mm |

### Technical data

|                                                   |        |
|---------------------------------------------------|--------|
| Mounting opening cover                            | yes    |
| Floor care                                        | Wet    |
| Seal installation option                          | yes    |
| Installation opening for on-floor tank            | yes    |
| Suitable for screed-flush closed underfloor ducts | no     |
| Suitable for screed-covered underfloor ducts      | yes    |
| Trunking width, max.                              | 350 mm |
| Trunking width, min.                              | 190 mm |
| Material thickness                                | 4 mm   |
| Mounting opening                                  | Square |
| Nominal size                                      | 350 mm |
| ROHS-conformant                                   | yes    |
| Heavy-duty version                                | no     |