

Technical data sheet

Flat-head screw with hexalobular internal G

Item number: 6049246



Flat-head screw with hexalobular internal to connect base and crossbeam of the symmetrical floor support BSS, to be used on walkable cable tray system BKRS.



St	Steel
G	Electrogalvanised

Master data

Item number	6049246
Type	FKS 6x12 G
Description 1	Flat head screw
Description 2	with hexagon socket
Manufacturer	OBO
Dimension	M6x12
Colour	zinc
Material	Steel
Surface	Electrogalvanised
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.53 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,013 kg CO2e / 1 Piece


Technical data sheet

Flat-head screw with hexalobular internal G

Item number: 6049246



Dimensions

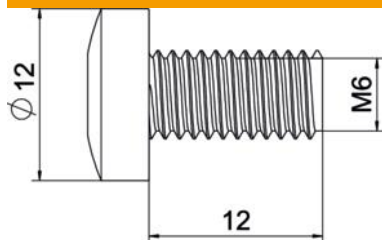

Dimension	M6x12
Length	12.6 mm
Width	12 mm
Dimension D	12 mm
Dimension L	12 mm

Technical data

Resistance grade	8.8
Thread	M6
Thread metric	6
Thread type	Metric
Thread length	12 mm
Fibre-glass reinforced	no
Halogen-free	yes
Head diameter	12 mm
Head shape	Flat head
Head shape	Flat head
With flange	no
With nut	no
With washer	no
ROHS-conformant	yes
Rustproof steel, pickled	no
Shank length	12
Impact-resistant	no
Screw system	Torx
Self-locking	no
Full thread	yes
Left thread	no
Thread, imperial	1/4"