

Technical data sheet


Installation frame for three single Modul 45® devices

Item number: 7408672



For the installation of 3 individual Modul 45 devices for System 55 service outlets with mounting support for vertical installation of Modul 45 devices.

The installation frame is designed for use with 0° sockets (mounting direction turned through 90°, contact openings at top and bottom) and their use in conjunction with angled and straight connectors.

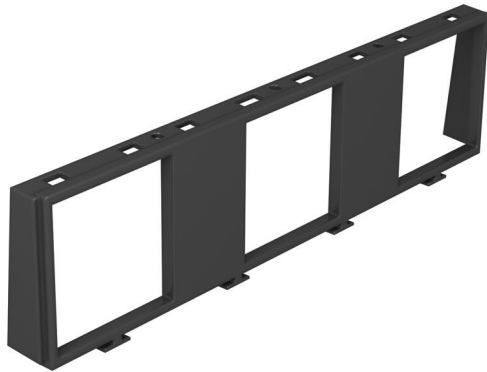

Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

Item number	7408672
Type	MT45V 3
Description 1	Installation frame
Description 2	for 3 x 1 Modul 45
Manufacturer	OBO
Colour	Graphite black; RAL 9011
Material	Polycarbonate/Acrylnitrile-butadiene-styrene
Smallest sales unit	5
Unit of quantity	Piece
Weight	1.173 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0905 kg CO2e / 1 Piece


Technical data sheet

Installation frame for three single Modul 45® devices

Item number: 7408672



Dimensions

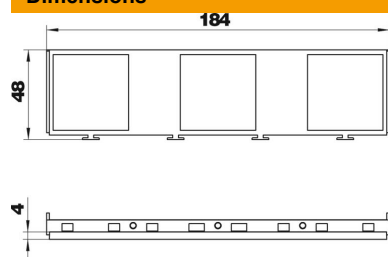

Technical data

Number of installable devices	3
Floor plate	no
Seal installation option	no
Suitable for raised floor installation	yes
Suitable for screed-flush closed underfloor ducts	yes
Suitable for screed-covered underfloor ducts	yes
Suitable for cavity floor installation	yes
Suitable for underfloor ducts	yes
Accessory mounting type	Lock
ROHS-conformant	yes
Strain relief option	yes