


Technical data sheet

Cable tray, marine standard, ALU

Item number: 6045707



Cable tray for use in ship construction, produced according to the marine standard VG 88900-1.

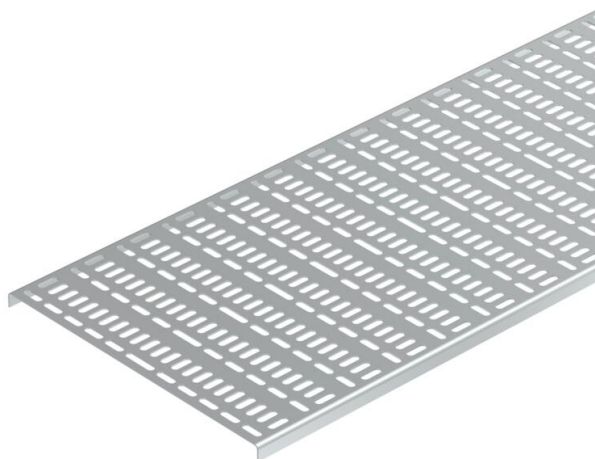

Alu Aluminium

Master data

Item number	6045707
Type	MKR 15 050 ALU
Description 1	Cable tray marine standard
Description 2	Material thickness 1.50mm
Manufacturer	OBO
Dimension	15x50x2000
Colour	aluminium
Material	Aluminium
Smallest sales unit	2
Unit of quantity	Metre
Weight	25.5 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	4,7154 kg CO2e / 1 Meter


Technical data sheet

Cable tray, marine standard, ALU

Item number: 6045707



Dimensions

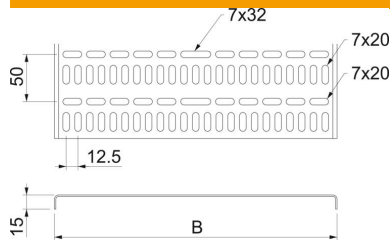

Dimension	15 x 50
Length	2,000 mm
Width	50 mm
Height	15 mm
Plate thickness	1.5 mm
Dimension B	50 mm

Technical data

Connector version	Without connectors
Walkable	no
Maintain electrical functions	no
With cover	no
Mounting perforation in base	yes
NATO hole pattern	yes
ROHS-conformant	yes
Rustproof steel, pickled	no
Side perforation	no
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

Loads

Support spacing 1.0 m	0.3 kN/m
Support spacing 1.5 m	0.05 kN/m